

SP-5B41 Open Box Module



Features:

- Enhanced maintenance process.
- New modular design
- Change screen size with easy "snap-on box module"
- Programmable with GP Pro EX v4.07 or greater or with BLUE software*
- Enhanced Connectivity: 2 Ethernet ports, 2 COM ports, 3 Type A USB ports, 1 mini USB


Performance Specifications

Models	SP-5B41 Open Box	
Part Number	PFXSP5B41	
Operating System	Windows® Embedded Standard 7 with Service Pack 1	
CPU	Intel Atom Processor E3825 1.3GHZ Dual core/Dual thread	
Main Memory	DDR3L SDRAM 2 GB	
Application Memory	64 MB - Free space about 17 GB	
Backup Memory	NVRAM 320 KB	
Interfaces	Serial	COM1 COM2
	Ethernet	Standard: IEEE802.3u/IEEE802.3ab, 10BASE-T/100BASE-TX/1000BASE-T Connector: Modular jack (RJ-45) x 2
	USB	Type A (V2.0) x3, Mini B (V2.0) x 1
	SD Card	SD Card Slot (Storage) x 1
	CFast Card	CFast Card Slot (System) x 1, CFast Card Slot (Storage) x 1
	Video Output	DVI-D OUT Connector: DVI-D 24 pin (socket) x 1
	Audio Output	Speaker Output: 300mW (Rated Load: 8Ω, Frequency : 1kHz) LINE Output: Rated load: 10kΩ or more Connector: 2-piece terminal block (AUX) x 1

General Specifications

Input Voltage	12Vdc (Supply from Display Module)
Power Consumption	25W (max), 15W or less (when power is not supplied to external devices)
Surrounding Air Temperature	0...60 °C [32...140 °F]
Storage Temperature	- 20 to +60 °C (- 4 to +140 °F)
Certifications	UL 61010-1 & UL61010-2-201, CSA-C22.2 No.61010-1 & CSA-C22.2 No.61010-2-201, CE, RoHS, GOST-R
Ratings	UL/CSA Class 1 Div 2 Group A,B,C and D, CSA C22.2No213, ANSI/ISA 12.12.01, EN61000-6-4, EN61000-6-2, Class 1 Div 2 Groups A, B, C and D, IP65, Standard EN/IEC 61131-2
Surrounding Air and Storage Humidity	10%...90% RH (Non condensing, wet bulb temperature / 39°C [102.2 °F] or less)
Dust	0.1 mg/m3 (10-7 oz/ft3) or less (non-conductive levels)
Pollution Degree	For use in Pollution Degree 2 environment
Corrosive Gas	Free of corrosive gases
Atmospheric Pressure (Operating Altitude)	800...1,114 hPa (2,000 m [6,561 ft] or lower)
Vibration Resistance	IEC/EN 61131-2 compliant / 5...9 Hz Single amplitude 3.5 mm (0.14 in.) / 9...150 Hz Fixed acceleration: 9.8 m/s2 / X, Y, Z directions for 10 cycles (approx. 100 min.)
Shock Resistance	IEC/EN 61131-2 compliant / 147 m/s2, X, Y, Z directions for 3 times
Electrostatic Discharge Immunity	Contact Discharge Method: 6 kV (IEC/EN 61000-4-2 Level 3)
Weight	0.9kg [1.98lb] or less
External Dimensions	W188 x H131 x D45m [W7.4 x H5.16 x D1.77 in.]

External Dimensions — SP-5B41

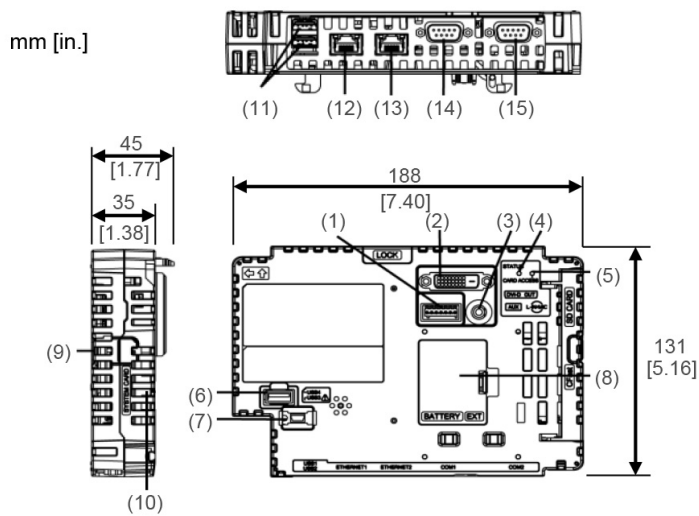


- (1) Auxiliary Output/Speaker Output Interface (AUX)
- (2) DVI-D Output Interface
- (3) AUDIO Input Interface (LIN/MIC)
- (4) Status LED
- (5) Card Access LED
- (6) USB (Type A) Interface
- (7) USB (mini-B) Interface
- (8) Expansion Unit Interface Cover (EXT)
- (9) Storage Card Cover
- (10) System Card Cover
- (11) USB (Type A) Interface
- (12) Ethernet Interface (ETH1)
- (13) Ethernet Interface (ETH2)
- (14) Serial Interface (COM1)
- (15) Serial Interface (COM2)

Options

Part Number	Product Name	Description
PFXZCDCNAUX1	AUX Connector	AUX connector required in case an external output is used (5 pcs/set).
PFXZCDS1GC61	SD Memory Card (1 GB)	SD Memory Card (1 GB, SLC, Class 6) for System Card
PFXZCDS162	CFast Card	16 GB
PFXZCDS321	CFast Card	32 GB

Modular Design and Easy Maintenance

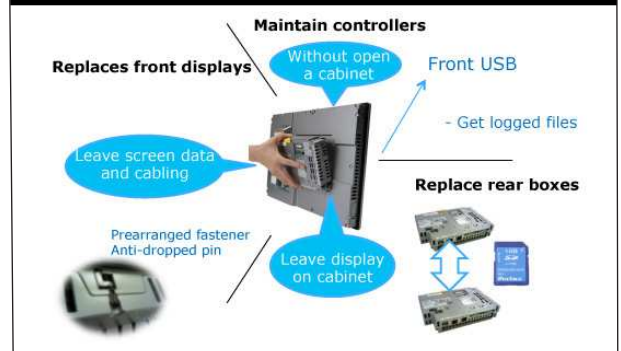

Model Number Configuration - Combine a Box Module and Display Module

Display Module

PFXSP5 *** D

(1) (2) (3) (4) (5)

(1) Size	(2) Wireless LAN	(3) Resolution	(4) Touch Panel		(5) Power Supply
8 19"	60 Yes	T TFT	C	Projected Capacitive (5 points multi-touch)	D DC
7 15"	00 -	W Wide TFT	P	Resistive Film (analog, 2 points multi-touch)	
6 12"			A	Resistive Film (analog, single-touch)	
5 10"					
4 7"					

*Color selectable display modules are available. In addition to Silver, there are three optional colors, Coated models are also available as a customized product.

Black Beige Off-white



Box Module

PFXSP5 B **

(6) (7)

(6) Module Type	(7) Class
B Box	41 Open
	10 Power

*Coated models are also available as a customized product.

KOMTEK LLC,
 Saint-Petersburg, Pulkovskoe shosse 30/4, office 108
 Phone: +7 812 336 47 06
 e-mail: office@komtek-spb.ru
 web : www.komtek-spb.ru