

EZ Tower Light



Features:

- Easy deployment, configure functions via a software template eliminates the need to program tower light functions in ladder logic.
- A single product for a wide range of customers
- USB installation simplifies wiring
- Make your status system easier to understand by leveraging the multi-color LEDs which allows the flexibility to control 4 colors and 2 flash rates per unit


Specifications

Model	PFXZCETWHA1	PFXZCETWW1
Description	EZ Tower Light tube mounting with fixing plate	EZ Tower Light with base mounting
Supported Software	GP-Pro EX Ver. 3.6 or later	
Supported HMI Models	SP5000, GP4000 Series, GP4000M Modular HMI Series*, LT4000M, Except GP4100	
* When you connect with GP4000M Series, please connect via self power USB Hub.		

General Specifications

Model	PFXZCETWHA1	PFXZCETWW1
Description	EZ Tower Light tube mounting with fixing plate	EZ Tower Light with base mounting
Certifications	UL 508, cUL, CSA22.2, CE	
Color	Red / Green / Blue / Yellow	
Light Mode	Off / On / Blink (High) / Blink (Low)	
Buzzer	4 sounds	
Buzzer Volume	High / Middle / Low	
Buzzer Tone	High / Low	
Buzzer	85dB	82dB
Interface	USB 2.0 (Mini B)	
Supply Voltage	DC 5V (Powered from USB bus)	
Power Consumption	2W	
Surrounding Air Operating Temperature	0 to 55 ° (32 to 131 °)	
Operating Humidity	35 to 85%RH (no condensation)	
Operating Atmosphere	No Corrosive Gas	
Storage Temp.	-35 to 70 ℃ (-95 to 158 ℉)	
Protection	IP54	
Weight	0.3kg (0.66lb)	

Diminision Drawing

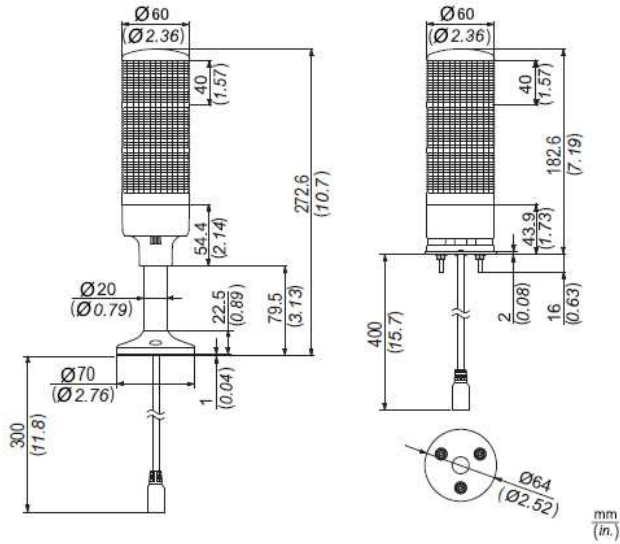

Ordering Information

Part Number	Description
PFXZCETWW1	EZ Tower Light with base mounting
PFXZCETWHA1	EZ Tower Light tube mounting with fixing plate

Options


Part Number	Description
ZC9USCBMB1	Cable for connecting from an EZ Tower Light to a Pro-face's interface unit.
XVGUZ02*	Cable lock to prevent disconnection of USB cable

*One piece is included with the EZ Tower Light unit.

Easily Connect to Pro-face HMIs

For Operation

Project Transfer

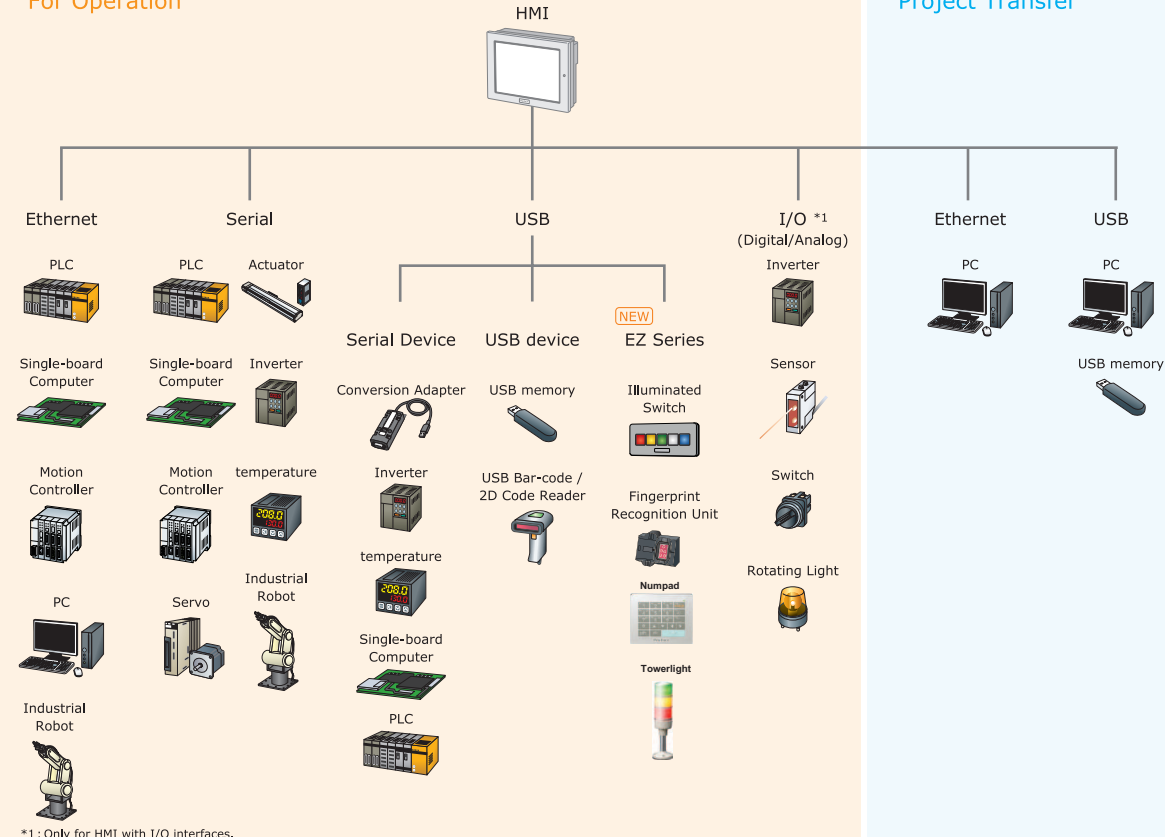

*1: Only for HMI with I/O interfaces.

KOMTEK LLC,
 Saint-Petersburg, Pulkovskoe shosse 30/4 office 108
 Phone: +7 812 336 47 06
 e-mail: office@komtek-spб.ru
 web : www.komtek-spб.ru